


BSPP FEMALE (THRUST-WIRE NUT) (1)

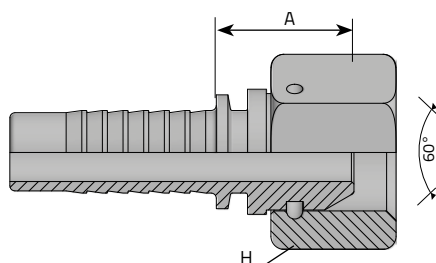


FEMMINA DIRITTA BSPP SV 60° DADO SPINATO CON O-RING
 FEMELLE DROITE BSPP AVEC O-RING CÔNE 60° (ÉCROU À JONC)
 DKOR 60° KONUS MIT O-RING (BSPP- GEWINDE) + GESTIFTETE
 ÜBERWURFMUTTER
 HEMBRA GIRATORIA RECTA BSPP CON O-RING CONO 60° (TUERCA CON
 SEGURO)

* : without o-ring / senza o-ring

| | Code | Tube | | | Thread | | Dimensions | | | Pressure | |
|---|-----------|------|-------|------|--------|------|------------|----|-----|----------|--|
| | | D.N. | Hose | Diam | T | t/1" | H | A | Bar | Psi | |
| | | Inch | | mm | Inch | | mm | mm | | | |
| * | FDG0302SP | -3 | 3/16" | 4.8 | 1/8" | 28 | 14 | 18 | 350 | 5076 | |
| * | FDG0304SP | -3 | 3/16" | 4.8 | 1/4" | 19 | 19 | 18 | 415 | 6019 | |
| * | FDG0402SP | -4 | 1/4" | 6.4 | 1/8" | 28 | 14 | 18 | 350 | 5076 | |
| * | FDG0404SP | -4 | 1/4" | 6.4 | 1/4" | 19 | 19 | 18 | 450 | 6526 | |
| * | FDG0406SP | -4 | 1/4" | 6.4 | 3/8" | 19 | 22 | 19 | 450 | 6526 | |
| * | FDG0408SP | -4 | 1/4" | 6.4 | 1/2" | 14 | 27 | 21 | 450 | 6526 | |
| * | FDG0504SP | -5 | 5/16" | 7.9 | 1/4" | 19 | 19 | 18 | 350 | 5076 | |
| * | FDG0506SP | -5 | 5/16" | 7.9 | 3/8" | 19 | 22 | 19 | 350 | 5076 | |
| * | FDG0508SP | -5 | 5/16" | 7.9 | 1/2" | 14 | 27 | 21 | 350 | 5076 | |
| * | FDG0604SP | -6 | 3/8" | 9.5 | 1/4" | 19 | 19 | 19 | 450 | 6526 | |
| * | FDG0606SP | -6 | 3/8" | 9.5 | 3/8" | 19 | 22 | 20 | 450 | 6526 | |
| * | FDG0608SP | -6 | 3/8" | 9.5 | 1/2" | 14 | 27 | 21 | 450 | 6526 | |
| * | FDG0806SP | -8 | 1/2" | 12.8 | 3/8" | 19 | 19 | 20 | 415 | 6019 | |
| * | FDG0808SP | -8 | 1/2" | 12.8 | 1/2" | 14 | 27 | 22 | 415 | 6019 | |
| | FDG0812SP | -8 | 1/2" | 12.8 | 3/4" | 14 | 32 | 24 | 415 | 6019 | |
| * | FDG1008SP | -10 | 5/8" | 16 | 1/2" | 14 | 27 | 22 | 350 | 5076 | |

BSPP FEMALE (THRUST-WIRE NUT) (2)

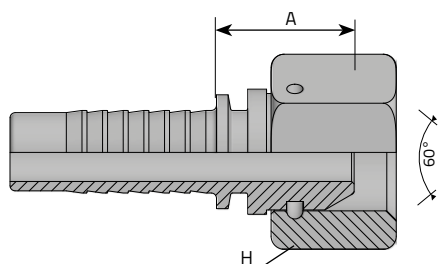

FEMMINA DIRITTA BSPP SV 60° DADO SPINATO CON O-RING
 FEMELLE DROITE BSPP AVEC O-RING CÔNE 60° (ÉCROU À JONC)
 DKOR 60° KONUS MIT O-RING (BSPP- GEWINDE) + GESTIFTETE
 ÜBERWURFMUTTER
 HEMBRA GIRATORIA RECTA BSPP CON O-RING CONO 60° (TUERCA CON
 SEGURO)

* : without o-ring / senza o-ring

| Code | Tube | | | Thread | | Dimensions | | | Pressure | |
|-------------|------|--------|------|--------|------|------------|------|-----|----------|--|
| | D.N. | Hose | Diam | T | t/1" | H | A | Bar | Psi | |
| | Inch | mm | Inch | mm | mm | mm | | | | |
| FDG1012SP | -10 | 5/8" | 16 | 3/4" | 14 | 32 | 24 | 350 | 5076 | |
| * FDG1208SP | -12 | 3/4" | 19 | 1/2" | 14 | 27 | 22.5 | 350 | 5076 | |
| FDG1212SP | -12 | 3/4" | 19 | 3/4" | 14 | 32 | 25 | 350 | 5076 | |
| FDG1612SP | -16 | 1" | 25.4 | 3/4" | 14 | 32 | 26 | 350 | 5076 | |
| FDG1616SP | -16 | 1" | 25.4 | 1" | 11 | 38 | 27 | 280 | 4061 | |
| FDG1620SP | -16 | 1" | 25.4 | 1.1/4" | 11 | 50 | 30 | 280 | 4061 | |
| FDG2020SP | -20 | 1.1/4" | 31.8 | 1.1/4" | 11 | 50 | 30 | 210 | 3046 | |
| FDG2024SP | -20 | 1.1/4" | 31.8 | 1.1/2" | 11 | 55 | 32 | 210 | 3046 | |
| FDG2424SP | -24 | 1.1/2" | 38.1 | 1.1/2" | 11 | 55 | 32 | 185 | 2683 | |
| FDG2432SP | -24 | 1.1/2" | 38.1 | 2" | 11 | 70 | 32.5 | 185 | 2683 | |
| FDG3232SP | -32 | 2" | 50.8 | 2" | 11 | 70 | 33.5 | 165 | 2393 | |