



JIC 37° FEMALE - 45° ELBOW - THRUST WIRE NUT (1)

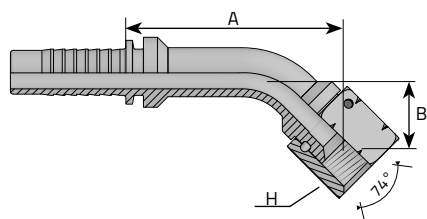

FEMMINA 45° JIC SV 37° CON DADO SPINATO
FEMELLE 45° JIC CÔNE 37° (ÉCROU À JONC)
DKJ 45° BOGEN 37° JIC DICHTKOPF (UNF)+GESTIFTETE ÜBERWURFMUTTER
HEMBRA GIRATORIA A 45° JIC CONO 37° (TUERCA CON SEGURO)

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
	Inch	mm	Inch			mm	mm	mm		
F45J0304SP	-3	3/16"	4.8	7/16"	20	17	15	38	350	5076
F45J0305SP	-3	3/16"	4.8	1/2"	20	17	17	40	350	5076
F45J0404SP	-4	1/4"	6.4	7/16"	20	17	15	38	350	5076
F45J0405SP	-4	1/4"	6.4	1/2"	20	17	17	40	350	5076
F45J0406SP	-4	1/4"	6.4	9/16"	18	19	16.5	39.5	250	3626
F45J0505SP	-5	5/16"	7.9	1/2"	20	17	17	40	350	5076
F45J0506SP	-5	5/16"	7.9	9/16"	18	19	18.5	49.5	250	3626
F45J0508SP	-5	5/16"	7.9	3/4"	16	24	19.5	50.5	250	3626
F45J0606SP	-6	3/8"	9.5	9/16"	18	19	18	53	250	3626
F45J0608SP	-6	3/8"	9.5	3/4"	16	24	19	54	250	3626
F45J0610SP	-6	3/8"	9.5	7/8"	14	27	21	56	200	2901
F45J0808SP	-8	1/2"	12.8	3/4"	16	24	20	62	200	2901
F45J0810SP	-8	1/2"	12.8	7/8"	14	27	21	63	200	2901
F45J0812SP	-8	1/2"	12.8	1.1/16"	12	32	22	64	200	2901
F45J1010SP	-10	5/8"	16	7/8"	14	27	22	60	200	2901
F45J1012SP	-10	5/8"	16	1.1/16"	12	32	25	63	200	2901

JIC 37° FEMALE - 45° ELBOW - THRUST WIRE NUT (2)

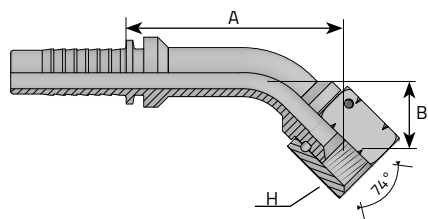

FEMMINA 45° JIC SV 37° CON DADO SPINATO
FEMELLE 45° JIC CÔNE 37° (ÉCROU À JONC)
DKJ 45° BOGEN 37° JIC DICHTKOPF (UNF)+GESTIFTETE ÜBERWURFMUTTER
HEMBRA GIRATORIA A 45° JIC CONO 37° (TUERCA CON SEGURO)

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
	Inch	mm	Inch		mm	mm	mm			
F45J1210SP	-12	3/4"	19	7/8"	14	27	29	62	200	2901
F45J1212SP	-12	3/4"	19	1.1/16"	12	32	29	62	200	2901
F45J1216SP	-12	3/4"	19	1.5/16"	12	41	29	63	160	2320
F45J1612SP	-16	1"	25.4	1.1/16"	12	32	39.5	100	200	2901
F45J1616SP	-16	1"	25.4	1.5/16"	12	41	39.5	88.5	160	2320
F45J1620SP	-16	1"	25.4	1.5/8"	12	50	38.5	89.5	125	1813
F45J2020SP	-20	1.1/4"	31.8	1.5/8"	12	50	44	101	125	1813
F45J2024SP	-20	1.1/4"	31.8	1.7/8"	12	55	45	103	100	1450
F45J2424SP	-24	1.1/2"	38.1	1.7/8"	12	55	45	118	100	1450
F45J2432SP	-24	1.1/2"	38.1	2.1/2"	12	70	45.5	121	80	1160
F45J3232SP	-32	2"	50.8	2.1/2"	12	70	65.5	156	80	1160