


KOMATSU STYLE FEMALE - 45° ELBOW

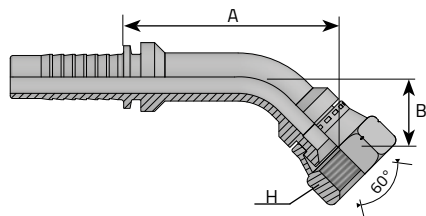

FEMMINA 45° METRICA "KOMATSU" SV 60°
 FEMELLE 45° MÉTRIQUE "KOMATSU" CÔNE 60°
 DKM 45° "KOMATSU" 60° KONUS METRISCH
 HEMBRA MÉTRICA A 45° "KOMATSU" CONO 60°

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
	Inch	mm	mm	mm	mm	mm	mm	mm		
F45K0414	-4	1/4"	6.4	M14 x 1.5	19	17	40		350	5076
F45K0416	-4	1/4"	6.4	M16 x 1.5	22	17	40		250	3626
F45K0516	-5	5/16"	7.9	M16 x 1.5	22	18.5	49.5		250	3626
F45K0614	-6	3/8"	9.5	M14 x 1.5	19	18	53		250	3626
F45K0616	-6	3/8"	9.5	M16 x 1.5	22	18	53		250	3626
F45K0618	-6	3/8"	9.5	M18 x 1.5	24	19	54		250	3626
F45K0818	-8	1/2"	12.8	M18 x 1.5	24	20	62		250	3626
F45K0820	-8	1/2"	12.8	M20 x 1.5	27	22	63		200	2901
F45K0822	-8	1/2"	12.8	M22 x 1.5	27	22	63		200	2901
F45K0824	-8	1/2"	12.8	M24 x 1.5	32	22	64		200	2901
F45K1022	-10	5/8"	16	M22 x 1.5	27	22	60		200	2901
F45K1024	-10	5/8"	16	M24 x 1.5	32	25	63		200	2901
F45K1230	-12	3/4"	19	M30 x 1.5	36	29	63		160	2320
F45K1633	-16	1"	25.4	M33 x 1.5	41	39.5	88.5		160	2320
F45K2036	-20	1.1/4"	31.8	M36 x 1.5	46	40	101		125	1813
F45K2442	-24	1.1/2"	38.1	M42 x 1.5	50	39	118		100	1450