


METRIC FEMALE 24° CONE - 45° ELBOW - S TYPE (1)

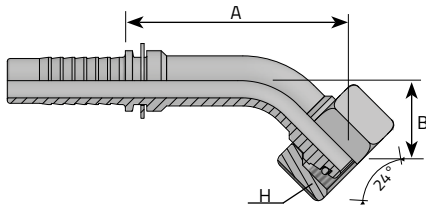


FEMMINA 45° METRICA O-RING 24° DKOS
 FEMELLE 45° MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE S
 DKO-S 45° BOGEN INNENGEWINDE MIT O-RING 24° KONUS
 HEMBRA MÉTRICA A 45° CON O-RING CONO 24° - SERIE S

* CRIMPED NUT
 DADO PINZATO

Code	Tube				Thread	Dimensions				Pressure	
	D.N.	Hose	Diam	T		D	H	B	A	Bar	Psi
	Inch	mm	mm	mm		mm	mm	mm	mm		
F45E0314S6	-3	3/16"	4.8	M14 x 1.5	6	19	15	37	420	6091	
F45E0316S8	-3	3/16"	4.8	M16 x 1.5	8	19	15	37	420	6091	
* F45E0414S6	-4	1/4"	6.4	M14 x 1.5	6	17	17	40	450	6526	
F45E0416S8	-4	1/4"	6.4	M16 x 1.5	8	19	17	50	450	6526	
F45E0418S10	-4	1/4"	6.4	M18 x 1.5	10	22	17	48.5	450	6526	
F45E0420S12	-4	1/4"	6.4	M20 x 1.5	12	24	17	48.5	450	6526	
F45E0518S10	-5	5/16"	7.9	M18 x 1.5	10	22	17	52.5	350	5076	
F45E0520S12	-5	5/16"	7.9	M20 x 1.5	12	24	20	50	350	5076	
* F45E0618S10	-6	3/8"	9.5	M18 x 1.5	10	22	20	55	450	6526	
F45E0620S12	-6	3/8"	9.5	M20 x 1.5	12	24	17	57	450	6526	
F45E0622S14	-6	3/8"	9.5	M22 x 1.5	14	27	19	59	450	6526	
F45E0822S14	-8	1/2"	12.8	M22 x 1.5	14	27	22	65	420	6091	
F45E0824S16	-8	1/2"	12.8	M24 x 1.5	16	30	22	66.5	420	6091	
F45E1030S20	-10	5/8"	16	M30 x 2	20	36	26	64.5	350	5076	
F45E1230S20	-12	3/4"	19	M30 x 2	20	36	27	64	350	5076	

METRIC FEMALE 24° CONE 45° - S TYPE (2)

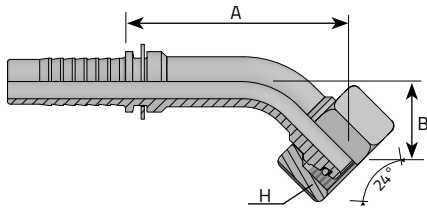

FEMMINA 45° METRICA O-RING 24° DKOS
 FEMELLE 45° MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE S
 DKO-S 45° BOGEN INNENGEWINDE MIT O-RING 24° KONUS
 HEMBRA MÉTRICA A 45° CON O-RING CONO 24° - SERIE S

Code	Tube		Diam	Thread	Dimensions				Pressure	
	D.N.	Hose			T	D	H	B	A	Bar
	Inch		mm	mm	mm	mm	mm	mm		
F45E1236S25	-12	3/4"	19	M36 x 2	25	46	28	70	350	5076
F45E1636S25	-16	1"	25.4	M36 x 2	25	46	38	88.5	280	4061
F45E1642S30	-16	1"	25.4	M42 x 2	30	50	38	89	280	4061
F45E2042S30	-20	1.1/4"	31.8	M42 x 2	30	50	35	104.5	210	3046
F45E2052S38	-20	1.1/4"	31.8	M52 x 2	38	60	35	104.5	210	3046
F45E2452S38	-24	1.1/2"	38.1	M52 x 2	38	60	45	119	185	2683