


## SAE 45° FEMALE (DOUBLE HEXAGON)

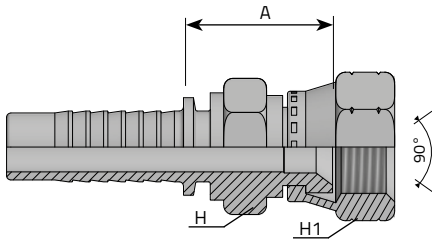

FEMMINA SAE DIRITTA CONO 45°  
 FEMELLE DROIT SAE CÔNE 45°  
 SAE DICHTKOPF 45° KONUS  
 HEMBRA GIRATORIA RECTA SAE 45°

| Code         | Tube |      |      | Thread  |      | Dimensions |    |      | Pressure |      |
|--------------|------|------|------|---------|------|------------|----|------|----------|------|
|              | D.N. | Hose | Diam | T       | t/1" | H          | H1 | A    | Bar      | Psi  |
|              | Inch |      | mm   | Inch    |      | mm         | mm | mm   |          |      |
| FDJ0404GIR45 | -4   | 1/4" | 6.4  | 7/16"   | 20   | 14         | 14 | 20.7 | 350      | 5076 |
| FDJ0405GIR45 | -4   | 1/4" | 6.4  | 1/2"    | 20   | 14         | 17 | 21.4 | 350      | 5076 |
| FDJ0607GIR45 | -6   | 3/8" | 9.5  | 5/8"    | 18   | 17         | 22 | 25.2 | -        | -    |
| FDJ0608GIR45 | -6   | 3/8" | 9.5  | 3/4"    | 16   | 19         | 22 | 27.3 | 250      | 3626 |
| FDJ0808GIR45 | -8   | 1/2" | 12.8 | 3/4"    | 16   | 19         | 22 | 27.8 | 250      | 3626 |
| FDJ0810GIR45 | -8   | 1/2" | 12.8 | 7/8"    | 14   | 22         | -  | 29.5 | 200      | 2900 |
| FDJ1212GIR45 | -12  | 3/4" | 19   | 1.1/16" | 12   | 27         | 32 | 35   | 200      | 2900 |