


NPTF SWIVEL MALE

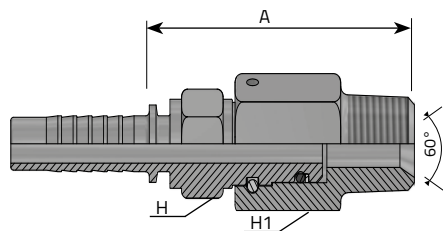

MASCHIO NPTF GIREVOLE SV 60°
MÂLE NPTF CÔNE 60°
 AGN 60° INNENKONUS (NPTF-GEWINDE)
MACHO NPTF GIRATORIO CONO 60°

*** NOT TO BE USED AS A LIVE SWIVEL**
 DA NON USARE COME APPLICAZIONE ROTANTE
NE PAS UTILISER COMME APPLICATION ROTATIVE
 NICHT ZU BENUTZEN ALS DREHVERSCHRAUBUNG
NO USAR COMO UNA PIEZA GIRATORIA VIVA

| | Code | Tube | | Thread | | Dimensions | | | Pressure | | |
|---|-------------|------|------|--------|------|------------|----|----|----------|-----|------|
| | | D.N. | Hose | Diam | T | t/1" | H | H1 | A | Bar | Psi |
| | | Inch | | mm | Inch | | mm | mm | mm | | |
| * | MNPTF0404SW | -4 | 1/4" | 6.4 | 1/4" | 18 | 14 | 17 | 53 | 350 | 5076 |
| * | MNPTF0406SW | -4 | 1/4" | 6.4 | 3/8" | 18 | 17 | 22 | 58,4 | 350 | 5076 |
| * | MNPTF0604SW | -6 | 3/8" | 9.5 | 1/4" | 18 | 17 | 17 | 56 | 350 | 5076 |
| * | MNPTF0606SW | -6 | 3/8" | 9.5 | 3/8" | 18 | 17 | 22 | 58,4 | 350 | 5076 |
| * | MNPTF0608SW | -6 | 3/8" | 9.5 | 1/2" | 14 | 22 | 27 | 63 | 350 | 5076 |
| * | MNPTF0806SW | -8 | 1/2" | 12.8 | 3/8" | 18 | 22 | 22 | 59,4 | 350 | 5076 |
| * | MNPTF0808SW | -8 | 1/2" | 12.8 | 1/2" | 14 | 22 | 27 | 63,5 | 350 | 5076 |
| * | MNPTF0812SW | -8 | 1/2" | 12.8 | 3/4" | 14 | 27 | 32 | 71,5 | 350 | 5076 |
| * | MNPTF1212SW | -12 | 3/4" | 19 | 3/4" | 14 | 32 | 32 | 72 | 350 | 5076 |
| * | MNPTF1616SW | -16 | 1" | 25.4 | 1" | 11.5 | 38 | 38 | 79,4 | 250 | 3626 |